

ORTAC METAL CABLE GLANDS SERIES



METAL CABLE GLANDS MINI GLAND BRASS


TECHNICAL DETAILS

Material

Cap nut	: Brass with nickel plated
Sealing ring	: TPV / Silicone / EPDM
Gland body	: Brass with nickel plated
O-ring	: NBR / TPV / Silicone / EPDM
Connection thread	: Metric (EN60423)/PG (DIN 40430)
Certificates	: ROHS, CE
Protection class	: IP68 - 3 bar
Temperature range	: -20 °C + 100 °C -40 °C + 150 °C (short term)

Properties

- Easy to assemble
- Long thread versions
- Appropriate to use in limited application areas
- Applicable for lighting industry

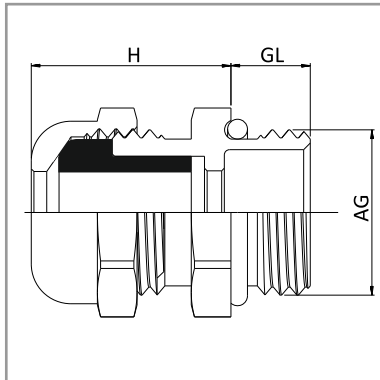

METRIC/PG THREAD CABLE GLANDS

AG Thread	Code	H mm	GL mm		
M 6 x 1,0	MGM6-23	10,5	6	8	2-3
M 8 x 1,25	MGM8s-35	15	6	11	3-5
M 8 x 1,25	MGM8-24	15	6	14	2-4
M 10 x 1,5	MGM10s-46	14,5	6	12	4-6
M 10 x 1,5	MGM10-24	15	6	14	2-4
M 10 x 1,5	MGM10-36	15	6	14	3-6
M 12 x 1,5	MGM12-24	15	6	14	2-4
M 12 x 1,5	MGM12-36	15	6	14	3-6
M 16 x 1,5	MGM16-68	16,5	6	18	6-8
PG 7	MGP7-24	15	6	14	2-4
PG 7	MGP7-36	15	6	14	3-6
PG 7	MGP7-68	16,5	6	17	6-8
PG 9	MGP9-46	16,5	6	17	4-6
PG 9	MGP9-68	16,5	6	17	6-8

IP 68

Halogen free

PRODUCT RANGE OVERVIEW

* Stainless steel version on request.