


ORTAC PLASTIC ACCESSORIES SERIES

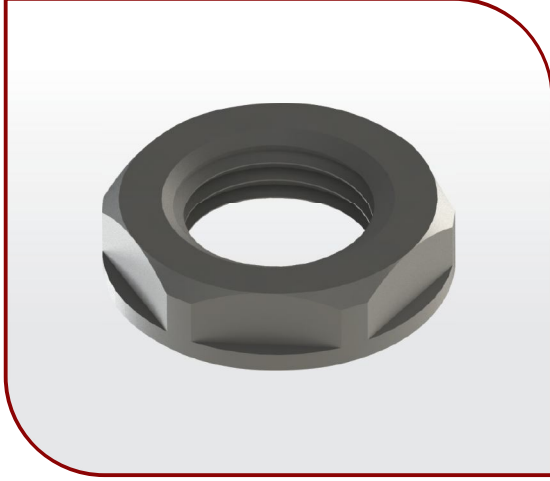

POLYAMIDE LOCK NUTS HEXAGONAL WITH COLLAR


TECHNICAL DETAILS

Material

Hexagonal lock nut : Polyamide PA6 V2 + 30% GF
 Connection thread : Metric (EN 60423)/PG (DIN 40430)
 Certificates : ROHS,CE,PT,TUV
 Temperature range : -20 °C +100 °C
 -30 °C +150 °C (short term)

Properties

Hexagonal with flange
 For tightening of cable glands
 UV resistance
 Halogen free



ŞAPKALI SOMUN

Hammaddesi : Polyamid PA6 V2
 Renk : RAL 7001 (Gri)
 : RAL 7035 (Açık Gri)
 : RAL 9005 (Siyah)
 Bağlantı dişi M : EN 60423
 Bağlantı dişi PG : DIN 40430
 Sürekli ısıya direnci : -20 °C + 100 °C
 Kısa süreli ısıya direnci : -30 °C + 150 °C



METRIC/PG THREAD LOCK NUTS

AG Thread	Gray Code ■ RAL 7001	L. Gray Code ■ RAL 7035	Black Code ■ RAL 9005	H mm	mm
M 12 x 1,5	RMSG 01	RMSL 01	RMSB 01	5	18
M 16 x 1,5	RMSG 02	RMSL 02	RMSB 02	5	22
M 20 x 1,5	RMSG 03	RMSL 03	RMSB 03	6	26
M 20 x 1,5	RMSG 03GM	RMSL 03GM	RMSB 03GM	8,25	26
M 25 x 1,5	RMSG 04	RMSL 04	RMSB 04	6	32
M 32 x 1,5	RMSG 05	RMSL 05	RMSB 05	7	41
M 40 x 1,5	RMSG 06	RMSL 06	RMSB 06	7	50
M 50 x 1,5	RMSG 07	RMSL 07	RMSB 07	8	60
M 63 x 1,5	RMSG 08	RMSL 08	RMSB 08	8	75
PG 7	ROSG 01	ROSL 01	ROSB 01	5	19
PG 9	ROSG 02	ROSL 02	ROSB 02	5	22
PG 11	ROSG 03	ROSL 03	ROSB 03	5	24
PG 13,5	ROSG 04	ROSL 04	ROSB 04	6	27
PG 16	ROSG 05	ROSL 05	ROSB 05	6	30
PG 21	ROSG 06	ROSL 06	ROSB 06	7	36
PG 29	ROSG 07	ROSL 07	ROSB 07	7	46
PG 36	ROSG 08	ROSL 08	ROSB 08	8	60
PG 42	ROSG 09	ROSL 09	ROSB 09	8	65
PG 48	ROSG 10	ROSL 10	ROSB 10	8	70

Halogen free

PRODUCT RANGE OVERVIEW