



METAL CABLE GLANDS STANDARD TYPE BRASS


TECHNICAL DETAILS

Material

| | |
|-------------------|-------------------------------------|
| Cap nut | : Brass with nickel plated |
| Clamping insert | : Polyamide PA6 V2 |
| Sealing ring | : TPV |
| Gland body | : Brass with nickel plated |
| O-ring | : NBR |
| Connection thread | : Metric (EN60423) / PG (DIN 40430) |
| Certificates | : UR, ROHS, CE, PT, TUV, |
| Protection class | : -20 °C + 100 °C |
| Temperature range | : -40 °C + 150 °C (short term) |

Properties

Easy to assemble
High strain relief

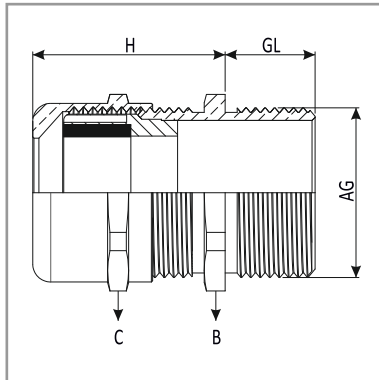

METRIC/PG THREAD CABLE GLANDS

| AG Thread | Code | H mm | GL mm | B mm | C mm | mm |
|--------------|----------|---------|----------|---------|---------|---------|
| M 12 x 1,5 | OMBGL 01 | 22 | 25 | 14 | 14 | 3 - 6,5 |
| M 16 x 1,5 | OMBGL 02 | 23 | 25 | 18 | 17 | 4 - 8 |
| M 20 x 1,5 | OMBGL 03 | 26,5 | 25 | 22 | 22 | 6 - 12 |
| M 25 x 1,5 | OMBGL 04 | 28 | 25 | 27 | 24 | 10 - 14 |
| M 32 x 1,5 | OMBGL 05 | 31,5 | 25 | 34 | 30 | 13 - 18 |
| M 40 x 1,5 | OMBGL 06 | 38 | 25 | 43 | 40 | 18 - 25 |
| PG 7 | OPBGL 01 | 22 | 25 | 14 | | 3 - 6,5 |
| PG 9 | OPBGL 02 | 23 | 25 | 17 | | 4 - 8 |
| PG 11 | OPBGL 03 | 24,5 | 25 | 20 | | 5 - 10 |
| PG 13,5 | OPBGL 04 | 26,5 | 25 | 22 | | 6 - 12 |
| PG 16 | OPBGL 05 | 28 | 25 | 24 | | 10 - 14 |
| PG 21 | OPBGL 06 | 31,5 | 25 | 30 | | 13 - 18 |
| PG29 | OPBGL 07 | 38 | 25 | 40 | | 18 - 25 |

IP 68

Halogen free