




## INDUSTRIAL TYPE GLANDS



## UNARMoured DOUBLE COMPRESSION CABLE GLANDS WUDCG SERIES

### TECHNICAL DETAILS

Type	: WUDCG (Double compression unarmoured gland)
Certificate	: PT-CE-Rohs-ISO9001-14001-Ohsas 18001 ROHS, CE, PT, TUV
Material	: MS58 Brass with or without nickel plated Stainless steel AISI303 / 316L / Aluminium
Standards	: EN 60079-0:2012, 60079-1:2007, 60079-1:2007 60079-31:2009
Protection class	: IP66 / 68
Temperature	: -30 °C +120 °C NBR : -40 °C +100 °C NEOPRENE : -60 °C +180 °C SILICONE : -30 °C +100 °C TPE/V
Cable type	: Unarmoured

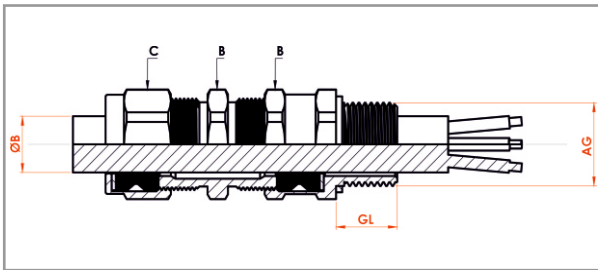

PRODUCT RANGE OVERVIEW

Product Size	Product Code	Standard AG	AG NPT	B		GL min. mm	C	
				Min	Max		mm	B
16	WUDCGXX-16-X	M16x1,5	1/2"	6,1	11,6	15	20	24
20s	WUDCGXX-20s-X	M20x1,5	1/2"	6,1	13,2	15	24	24
20	WUDCGXX-20-X	M20x1,5	1/2"	9,5	15	15	24	24
25	WUDCGXX-25-X	M25x1,5	3/4"	12,5	20	15	30	30
32	WUDCGXX-32-X	M32x1,5	1"	18,2	26,2	15	38	38
40	WUDCGXX-40-X	M40x1,5	1 1/4"	23,7	33,9	15	45	45
50	WUDCGXX-50-X	M50x1,5	1 1/2"	27,9	40,4	15	55	55
63s	WUDCGXX-63s-X	M63x1,5	2"	40,4	51	15	70	70
63	WUDCGXX-63-X	M63x1,5	2 1/2"	47,2	55,9	15	70	80
75s	WUDCGXX-75s-X	M75x1,5	2 1/2"	52,8	59	15	80	80
75	WUDCGXX-75-X	M75x1,5	3"	59,1	67,9	15	90	90